
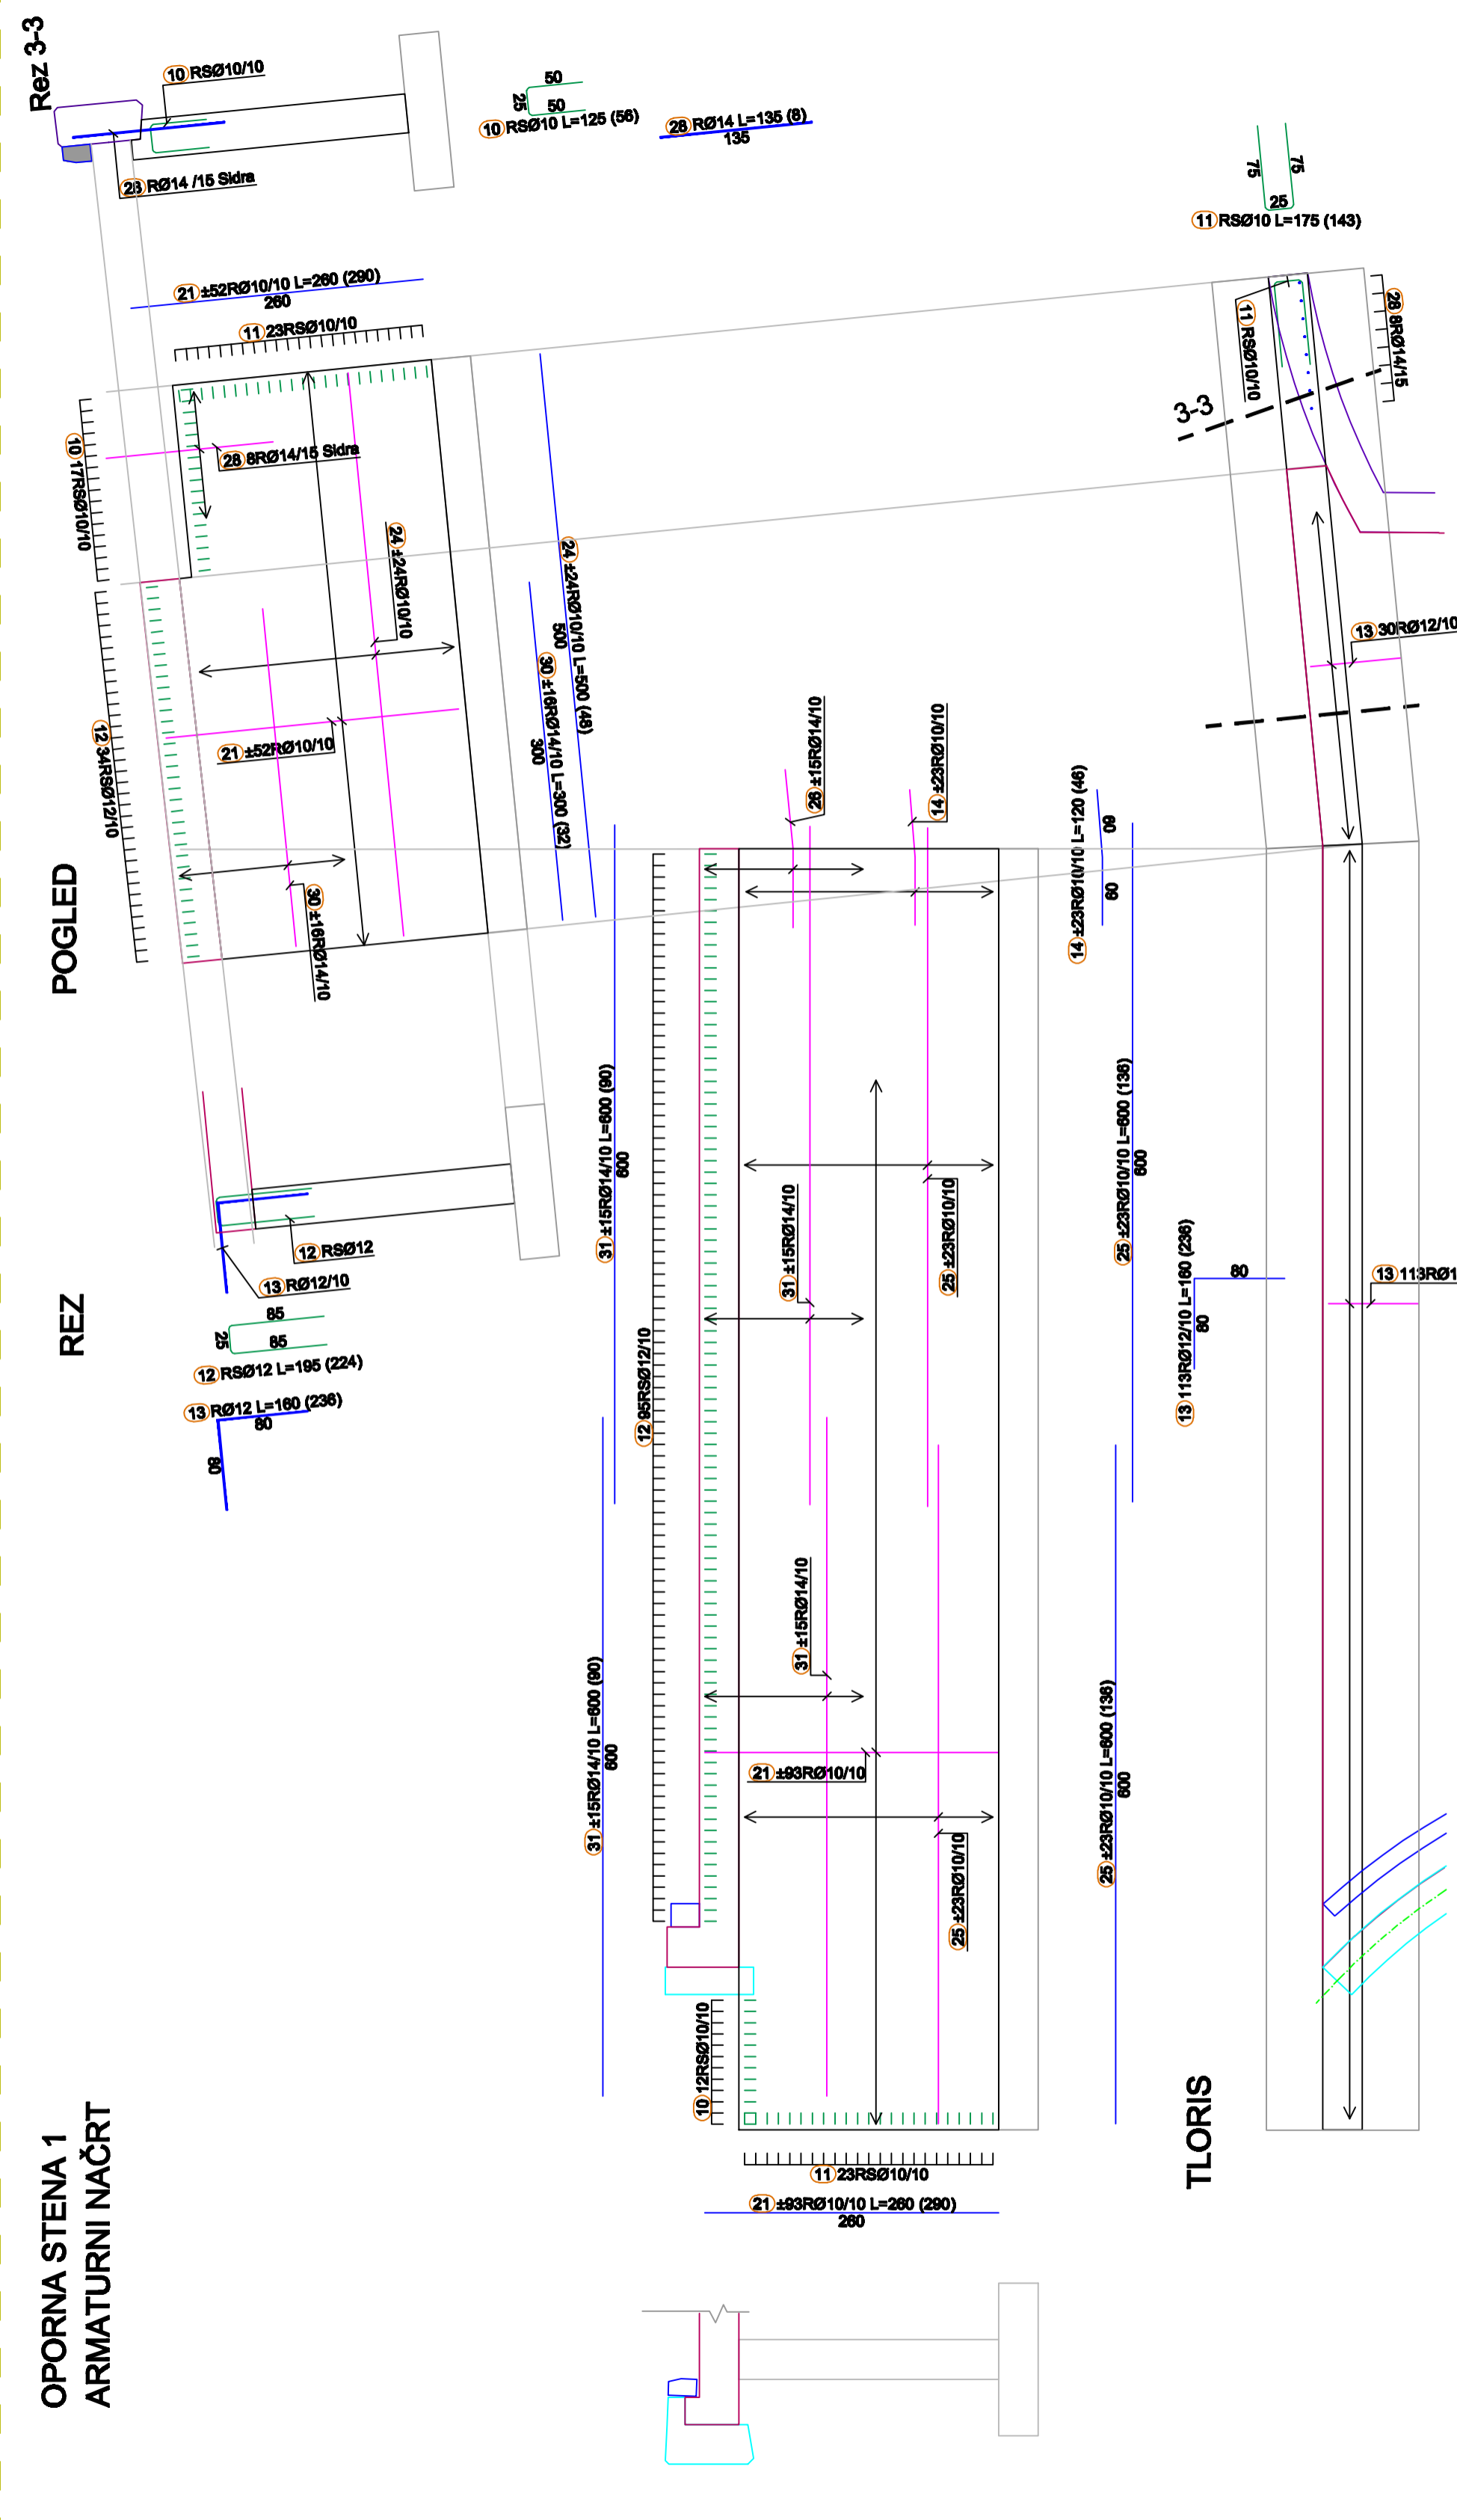


0,765 x 0,460 = 0,35 m²

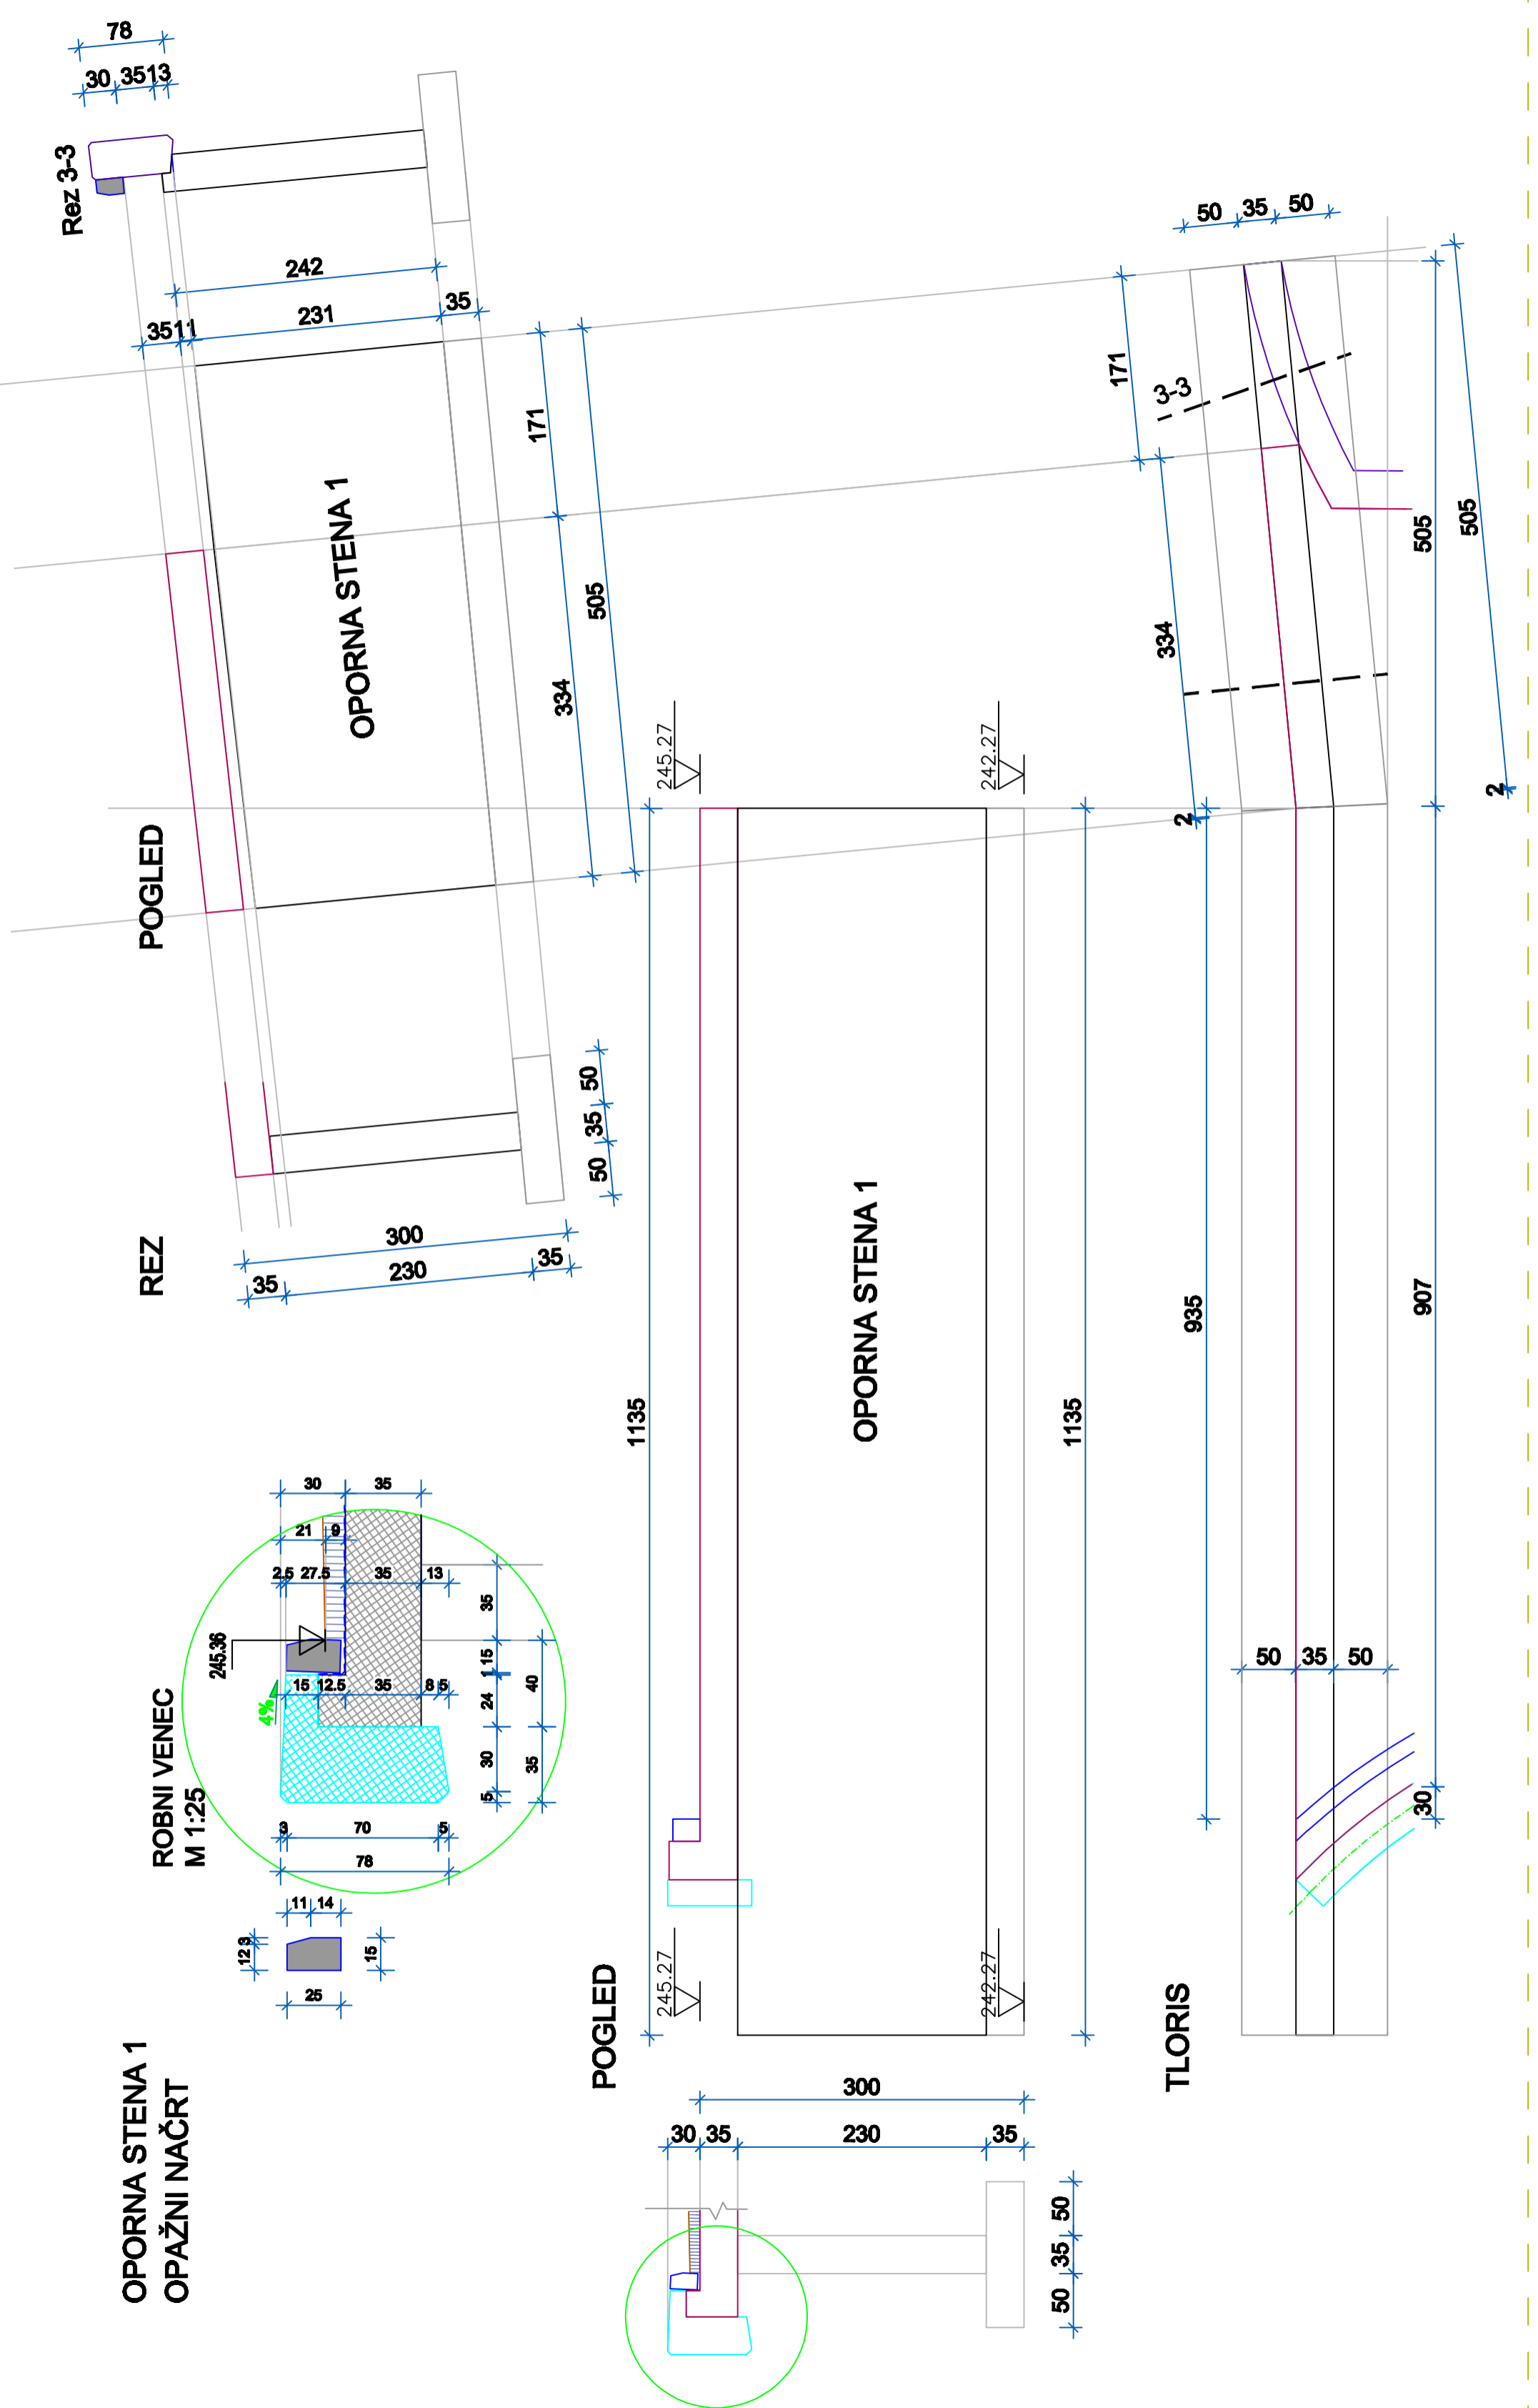

IZVLEČEK ZA LIST 3 IN 4

Palice - specifikacija					
ozn	oblika in mere [cm]	∅	lg [m]	n [kose]	lg _n [m]
PASOVNI TEMELJI (1 kos)					
10		10	1,25	56	70,00
11		10	1,75	143	250,25
12		12	1,95	224	436,80
13		12	1,80	236	377,60
14		10	1,20	46	55,20
15		10	1,10	44	48,40
16		10	0,85	16	13,60
17		10	2,15	10	21,50
18		10	2,20	48	105,60
19		10	2,30	44	101,20
20		10	2,55	220	561,00

OPORNE STENE (STENA 1)
- OPAŽNI / ARMATURNI NAČRT

BETON: C30/37, PV-II, XC4, XF2
krovni sloj betona c=4,5cm
ARMATURA: S500

EBS			
EBS,d.o.o., Beltinci 9231, Panonska ulica 24			
Investitor:	Občina ŠALOVCI, Šalovci 162, 9204 Šalovci		
Vsebina / objekt:	BETONSKI PREPUST v km 4+100		
Vrsta projekta:	PZI		
Odg. vodja proj:	mag. DARKO KOČAR univ. dipl. inž. grad. IZS G-0567		
Odg. projektant:	Roman Granfol univ. dipl. inž. grad. IZS G-1822		
Projektant:	Franc Prelog dipl. inž. grad.		
Merilo: M 1:50	Št. načrta: P20/2018-G	Datum: september 2019	List: 3-6