




PREREZ AB ZIDU Z OGRAJO, l=39m M 1:50

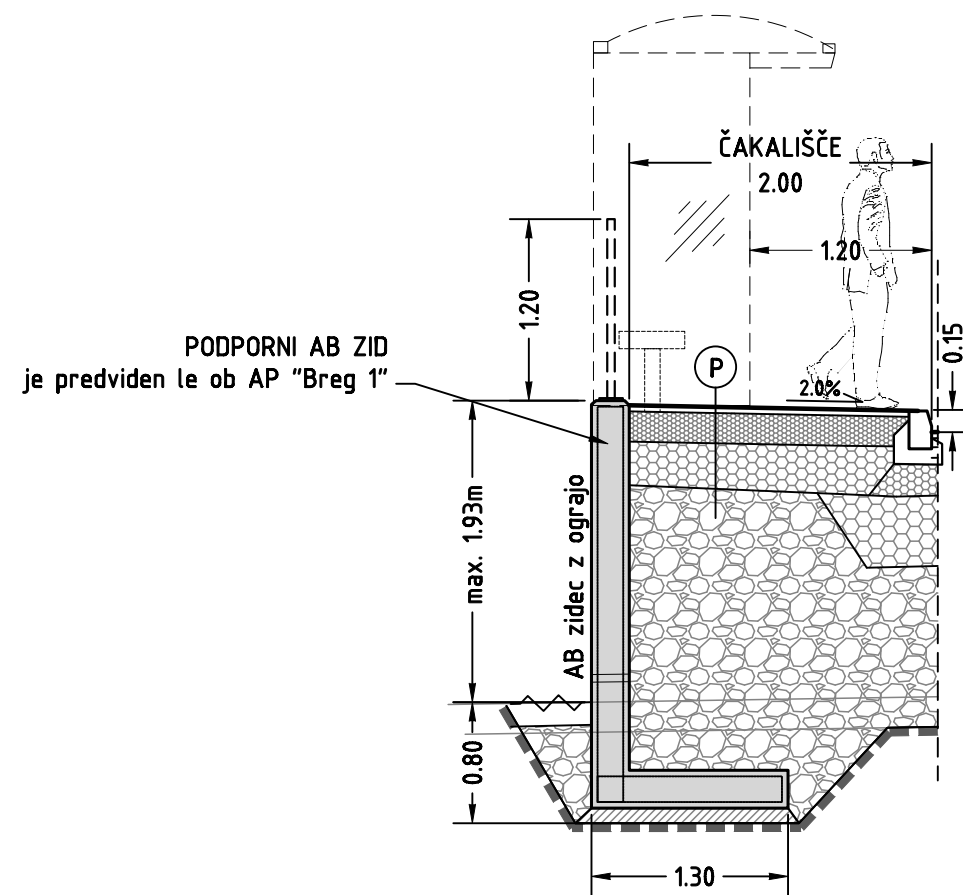


ARMATURA AB ZIDU, M1:20

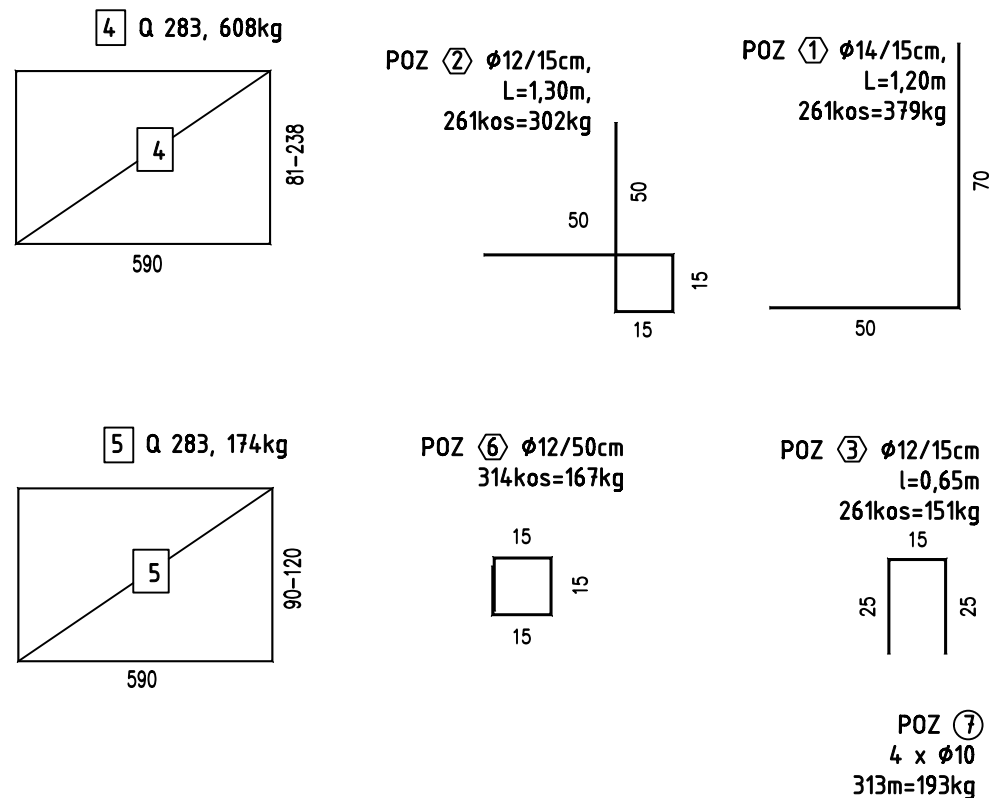

ARMATURA AB ZIDU, M1:20

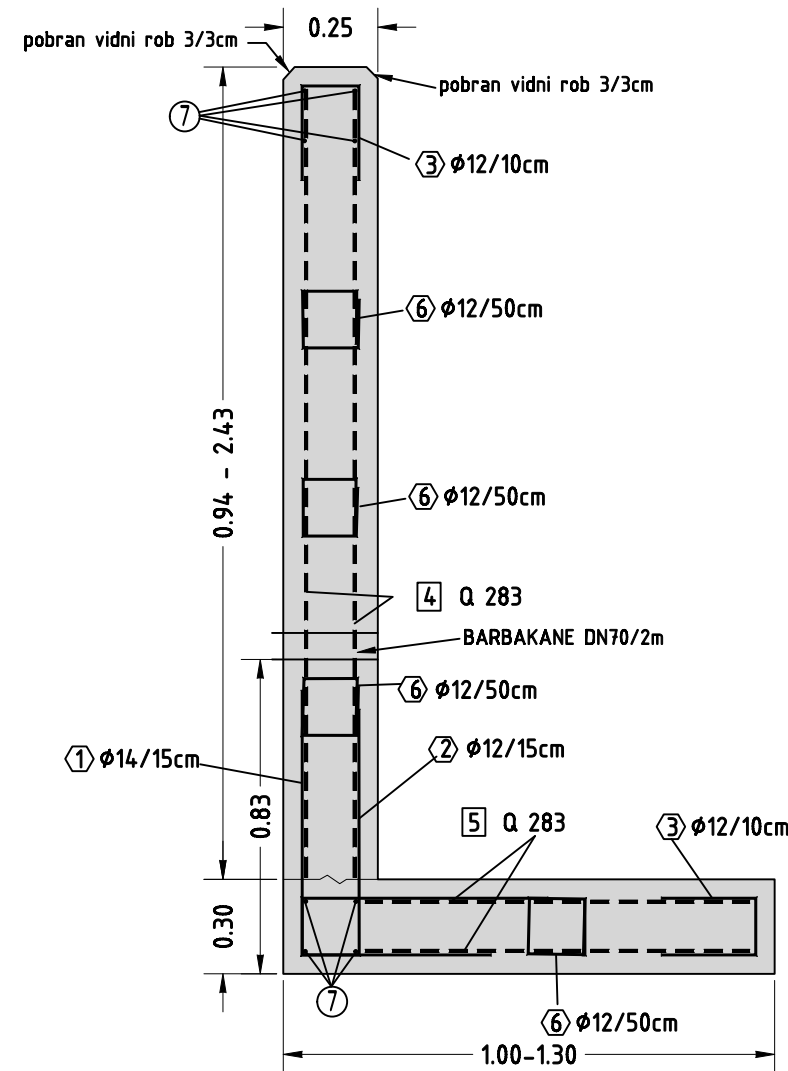

DILATACIJA (med kampadami)

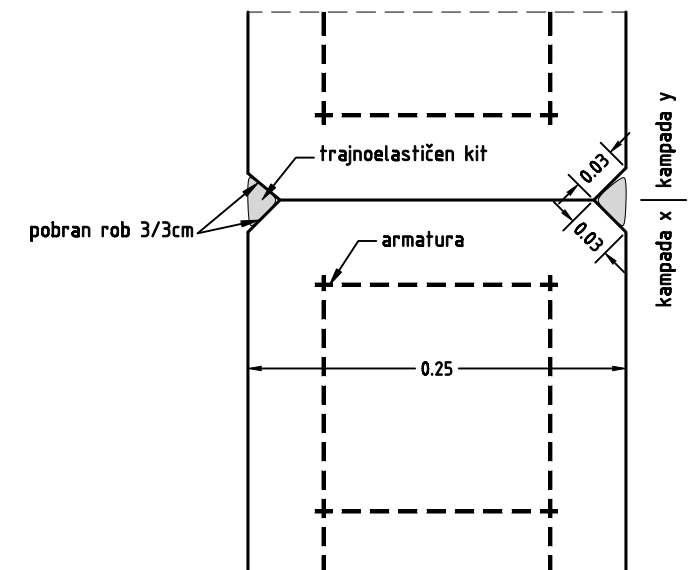


LEGENDA:

- S 500 (B) REBRASTA ARMATURA
- MAR 500/560
- C 30/37, PV-I, XD4 (TRUP ZIDU)
- C 25/30, PV-I (TEMELJ ZIDU)
- a=5cm
- Dolžina kampade 6m

OPOMBA: GLEJ PRILOŽEN SEZNAM ARMATURE IN KOLIČINE BETONA

projekt:

PZI "Grič-Breg"

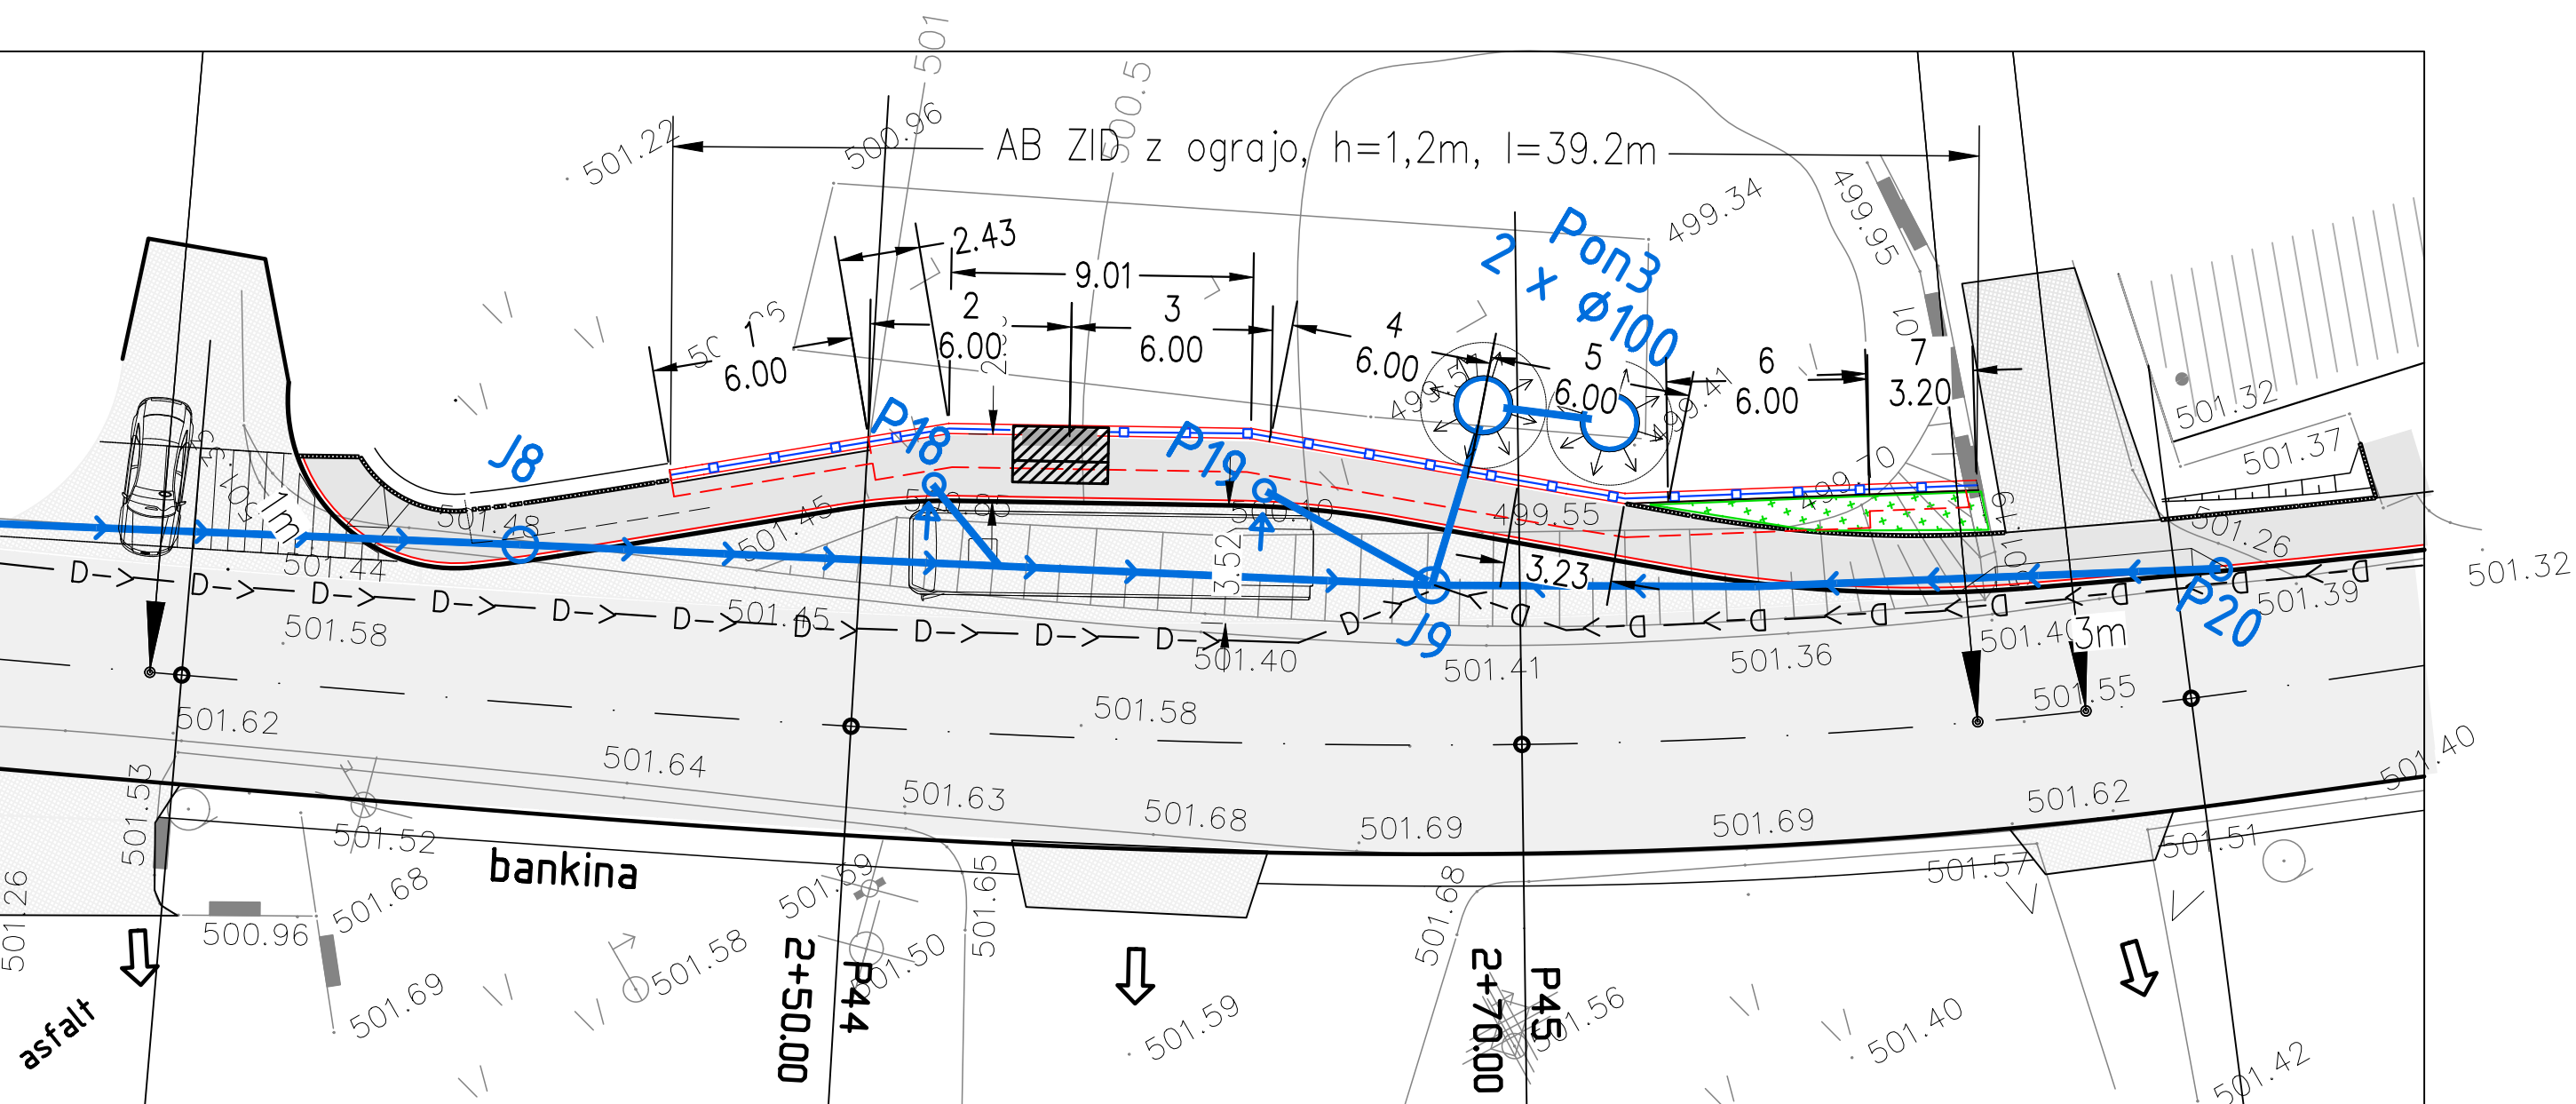

projekt: PZI "Grič-Breg"

SEZNAM ARMATURE IN KOLIČINE BETONA

objekt: AB ZID "Grič-Breg", P44,P45, l=39,2m

investitor: DRSI

datum: okt.18

DIMENZIJE ZIDU IN TEMELJA

višina trupa zidu:	94–243 cm
višina temelja	30 cm
skupaj	124–273 cm
širina temelja:	100–130 cm
dolžina zidu:	39,20 m
zaščitni sloj betona:	5 cm
če je element na 15 cm je	261 kosov
če je element na 50 cm je	78 kosov

ARMATURNE MREŽE

oznaka	mreža	širina [m]	dolžina [m]	površina [m2]	kosov	kg
4	Q283	1,12	5,90	6,61	2	59,4
4	Q283	1,46	5,90	8,61	2	77,4
4	Q283	1,85	5,90	10,92	2	98,0
4	Q283	2,38	11,80	28,08	2	252,3
4	Q283	1,77	5,90	10,44	2	93,8
4	Q283	0,97	3,10	3,01	2	27,0
5	Q283	1,20	9,20	11,04	2	99,2
5	Q283	0,90	9,20	8,28	2	74,4
skupaj:						781,4

ARMATURNE PALICE

oznaka	premer	kg/m	dolžina [m]	kosov	skupaj m	kg
1	14mm	1,208	1,20	261	313,60	378,8
2	12mm	0,888	1,30	261	339,73	301,7
3	12mm	0,888	0,65	261	169,87	150,8
6	12mm	0,888	0,60	314	188,16	167,1
7	10mm	0,617	39,10	8	312,80	193,0
					skupaj:	1191,4

BETON	kampada	f.t.	višina [m]	dolžina [m]	površina [m2]	širina[m]	V [m3]
TRUP	1	C30/37	1,17	6,00	7,02	0,30	2,11
TRUP	2	C30/37	1,51	6,00	9,03	0,30	2,71
TRUP	3	C30/37	1,90	6,00	11,37	0,30	3,41
TRUP	4	C30/37	2,43	12,00	29,16	0,30	8,75
TRUP	5	C30/37	1,82	6,00	10,89	0,30	3,27
TRUP	6	C30/37	1,02	3,20	3,26	0,30	0,98
TEMELJ	1	C25/30	0,30	9,20	2,76	1,00	2,76
TEMELJ	6	C25/30	0,30	30,00	9,00	1,30	11,70
skupaj						C30/37	21,22
						C25/30	14,46